




DIMENSION	TOLERANCE
BELOW 10 mm	± 0.3
10~100 mm	± 0.5
ABOVE 100 mm	± 0.8
ANGLE	± 3°

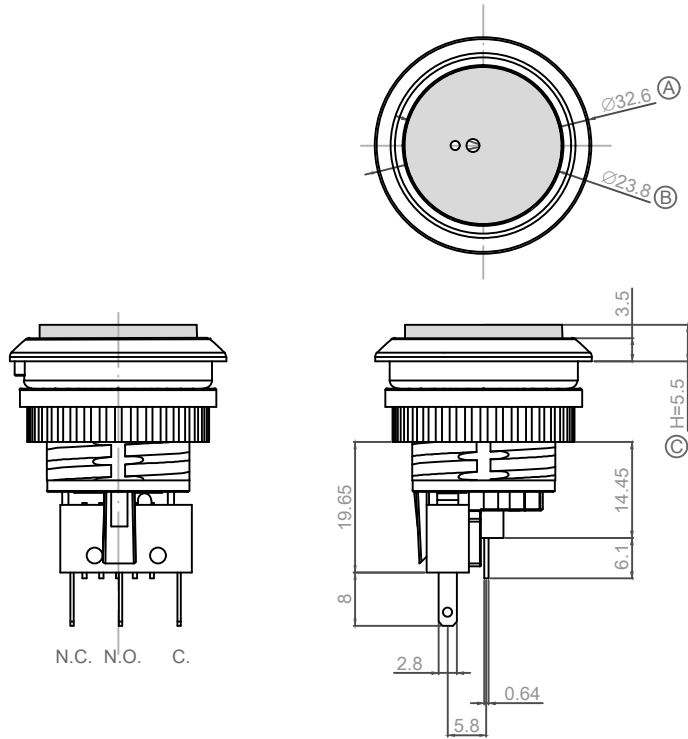

1. POLE - POSITION : SPDT
2. RATING : 3A 125/250VAC ; 3A 30VDC
3. CONTACT RESISTANCE : 300 m Ω MAX.
4. INSULATION RESISTANCE : 500 V DC , 100M Ω MIN.
5. OPERATION FORCE : 250 gf MAX.
6. OPERATION TEMPERATURE RANGE : -40°C ~ +85°C
7. OPERATION LIFE : CYCLES
8. CRITICAL DIMENSIONS: 'A' ~ 'H'

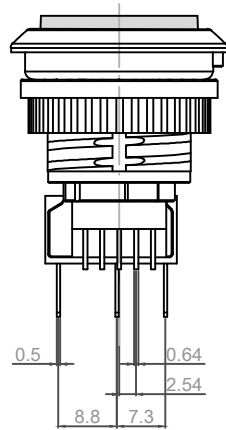

PANEL CUT OUT
H=6.8

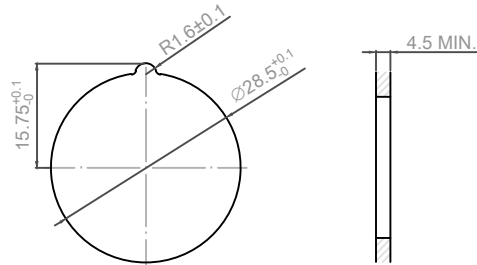


NUT AND SWITCH ARE IN SEPARATE PACKING


PS027-23-PA-K
(NUT)




HOUSING

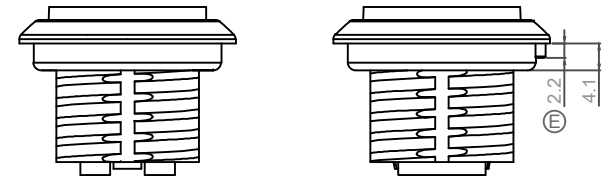

SWITCH

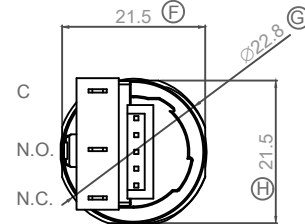

SENSOR

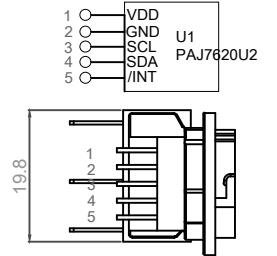

△					DATE	2026/07/30	UNIT	mm	MODE	GESTURE MODULE PUSH BUTTON
△					APPROVAL	KAVEN	SCALE	1 : 1	PART	GS001-AAKG61
△					CONFIRM	TEREANCE	VIEW		2D FILE NAME	GS001-AAKG61
	DATE	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION	DESIGN	HENRY	VER.	01	3D FILE NAME	

WB Well Buying
Industrial Co.,Ltd.